

# RINGO

DUS829 White

Project:

Type:

Cat. No.:

**LED Surface ceiling luminaire. Direct downlight.  
Driver included.**

**FIXTURE:**

**Mounting:** surface ceiling  
**Finish:** White ("powder coat")  
**Material:** Aluminum, acrylic glass cover  
 Wet Location Listed (for use indoors and outdoors)  
**CSA/US Listed**

**LAMP/LED SOURCE/COLOR TEMP:**

**-930**  
 12W LED / 3000K / CRI ≥ 90 / 1160lm  
 Efficacy (CRI ≥ 90): 96lm/W, Rated life > 50000hrs

**DRIVER:**

**-120V/277V-DIM10V**  
 Class 2 120-277Vac/60Hz  
 0-10V dimmable and TRIAC/ELV dimmable @120Vac(leading/trailing edge),  
 Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 500mA

**OPTIONS:**


**-120V-DIM**  
 Driver: Class 2 120V 60Hz, TRIAC/ELV dimmable (leading/trailing edge)

photometric files, dimming compatibility list and warranty information  
 available online at [www.dslightingus.com](http://www.dslightingus.com)




Shown above: DUS829-white-12W-930-120V-DIM

## Measurements (Inches)



## Light Distribution

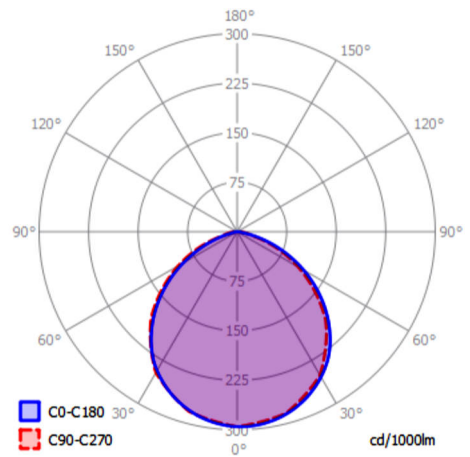

### ORDERING INFORMATION

### -SUFFIX

Model Number	Finish	LED Source	Color Temp.	Driver	
DUS829	-white	-12W	-930	-120V/277V - DIM10V	-120V-DIM
-	-				
-	-				
-	-				

Example of Catalog #: DUS829-white-12W-930-120V/277V-DRV

DLS Lighting US  
 3135 SR 580, Suite 6  
 Safety Harbor, FL 34695  
[www.dslightingus.com](http://www.dslightingus.com)  
[dlsus@dslightingus.com](mailto:dlsus@dslightingus.com)

