

HANGING BALI L Series

DUS902HL B/B	(Black fixture w/Black non-glare reflector)
DUS903HL B/G	(Black fixture w/Gold accent reflector)
DUS904HL W/B	(White fixture w/Black non-glare reflector)
DUS905HL W/G	(White fixture w/Gold accent reflector)

LED Surface ceiling, pendant luminaire.
Direct downlight w/adjustable 10° gimble.
Driver included.

FIXTURE:

Mounting: surface ceiling

Finish/Reflector: Black/Black (B/B), Black/Gold (B/G),
 White/Black (W/B), White/Gold (W/G)

Material: Aluminum

Damp Location Listed

CSA/US Listed

LAMP/LED SOURCE/COLOR TEMP:

-930 9.3W LED / 3000K / 38° / CRI ≥ 90 / 1120lm

-927 9.3W LED / 2700K / 38° / CRI ≥ 90 / 1070lm

Efficacy (CRI ≥ 90): 120lm/W, Rated life > 50000hrs

DRIVER:

-120V-DIM Class 2 120Vac 60Hz

TRIAC/ELV (leading/trailing edge dimmable)

Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 500mA

OPTIONS:

-38 -15 -25 reflector with 38°(Standard), 15° or 25° beam angle

Further mounting options see DUS-LP5, DUS-LP7 and DUS-LP8 spec sheets.

photometric files, dimming compatibility list and warranty information
 available online at www.dslightingus.com

Project:


Type:

Cat. No.:




Shown above: DUS904HL-W/B-9.3W-930-120V-DIM-38

Measurements (Inches)

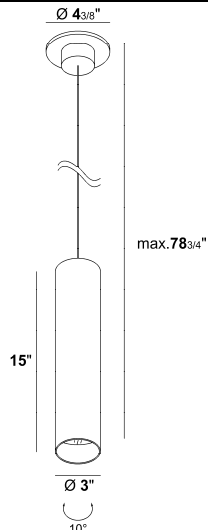

Light Distribution(38° Beam Angle) Standard

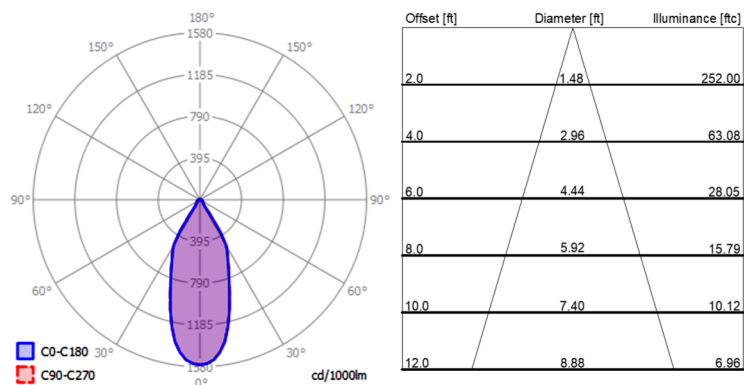


ORDERING INFORMATION

-SUFFIX

Model Number	Finish	LED Source	Color Temp.	Driver	Reflector
DUS902HL	-B/B	-9.3W	-927 -930	-120V-DIM	-38 -15 -25
DUS903HL	-B/G				
DUS904HL	-W/B				
DUS905HL	-W/G				

Example of Catalog #: DUS903HL-B/G-9.3W-930-120V-DIM-25

COLOR OPTIONS

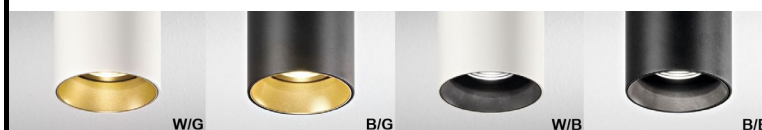

DLS Lighting US
 3135 SR 580, Suite 6
 Safety Harbor, FL 34695
www.dslightingus.com
dlsus@dslightingus.com

***DLS**
 LIGHTING|US