

LILLI

DUS255

White

LED Surface ceiling, pendant luminaire. Direct downlight.
Driver included.

FIXTURE:

Mounting: surface ceiling

Finish/Reflector: White

Material: Aluminum

Damp Location Listed (for use indoors)

CSA/US Listed

LAMP/LED SOURCE/COLOR TEMP:

-930

7W LED / 33° / 3000K / CRI ≥ 90 / 730lm

Efficacy (CRI ≥ 90): 104lm/W, Rated life > 50000hrs

DRIVER:

-120V-DIM

Class 2 120Vac/60Hz, TRIAC/ELV dimmable (leading/trailing edge),
Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 350mA

Further mounting options see DUS-LP5, DUS-LP7 and DUS-LP8
spec sheets.

photometric files, dimming compatibility list and warranty information
available online at www.dslightingus.com

Project:


Type:

Cat. No.:




Shown above: DUS255-white-7W-930-120V-DIM

Measurements (Inches)

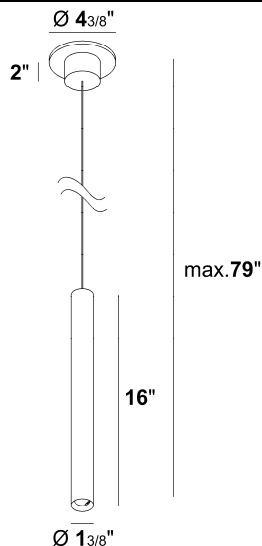

Light Distribution / Illuminance (33°)

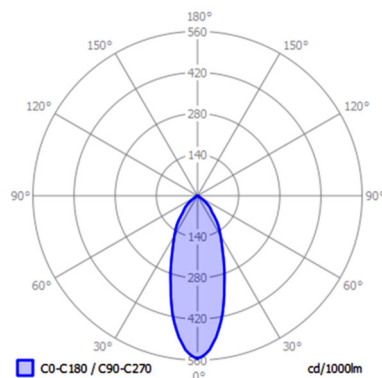

Offset [ft]	Diameter [ft]	Illuminance [ftc]
2.0	1.40	101.2
4.0	2.81	25.3
6.0	4.21	11.2
8.0	5.61	6.3
10.0	7.01	4.0
12.0	8.42	2.8

ORDERING INFORMATION

-SUFFIX

Model Number	Finish	LED Source	Color Temp.	Driver
DUS255	-white	-7W	-930	-120V-DIM
-	-			
-	-			
-	-			

Example of Catalog #: DUS255-white-7W-930-120V-DIM

DLS Lighting US
3135 SR 580, Suite 6
Safety Harbor, FL 34695
www.dslightingus.com
dlsus@dslightingus.com

***DLS**
LIGHTING|US