

ORBIT 2

DUS708 White DUS510 Black

Project:

Type:

Cat. No.:

LED Surface wall luminaire. indirect omnidirectional scone.
Driver included.

FIXTURE:

Mounting: surface wall

Finish: White, Black ("powder coat")

Material: Aluminum, acrylic glass

Damp Location Listed (for use indoors)

CSA/US Listed

LAMP/LED SOURCE/COLOR TEMP:

-927

7.5W LED / 2700K / CRI ≥ 90 / 660lm

Efficacy (CRI ≥ 90): 88lm/W, Rated life > 50000hrs

DRIVER:

-120V/277V-DRV

Class 2 120V-277Vac/60Hz not dimmable,

Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 350mA

-120V-DIM

Class 2 120Vac/60Hz, TRIAC/ELV dimmable (leading/trailing edge),


Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 350mA

photometric files, dimming compatibility list and warranty information
available online at www.dslightingus.com




Shown above: DUS510-black-7.5W-927-120V/277-DRV

Measurements (Inches)

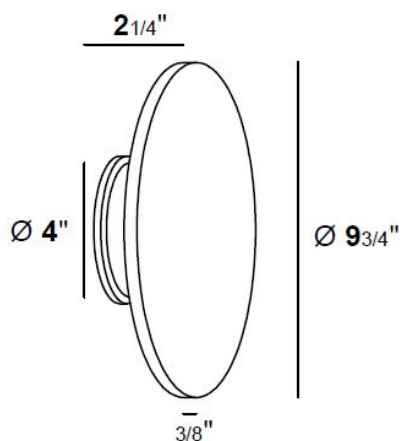

Light Distribution

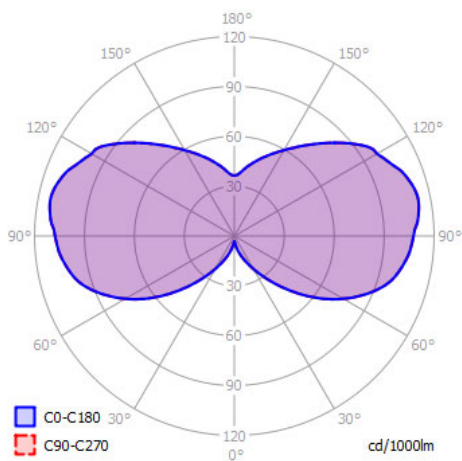

ORDERING INFORMATION

-SUFFIX

Model Number	Finish	LED Source	Color Temp.	Driver	
DUS708	-white	-7.5W	-927	-120V/277V-DRV	-120V-DIM
DUS510	-black				
-	-				
-	-				

Example of Catalog #: DUS708-white-7.5W-927-120V-DIM

DLS Lighting US
3135 SR 580, Suite 6
Safety Harbor, FL 34695
www.dslightingus.com
dlsus@dslightingus.com

***DLS**
LIGHTING|US

ORBIT 3

DUS709 White DUS512 Black

LED Surface wall luminaire. indirect omnidirectional sconce.
Driver included.

FIXTURE:

Mounting: surface wall

Finish: White, Black ("powder coat")

Material: Aluminum, acrylic glass

Damp Location Listed (for use indoors)

CSA/US Listed

LAMP/LED SOURCE/COLOR TEMP:

-927

7.5W LED / 2700K / CRI ≥ 90 / 660lm

Efficacy (CRI ≥ 90): 88lm/W, Rated life > 50000hrs

DRIVER:

-120V/277V-DRV

Class 2 120V-277Vac/60Hz not dimmable,

Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 350mA

-120V-DIM

Class 2 120Vac/60Hz, TRIAC/ELV dimmable (leading/trailing edge),

Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 350mA

photometric files, dimming compatibility list and warranty information
available online at www.dslightingus.com

Project:


Type:

Cat. No.:




Shown above: DUS512-black-7.5W-927-120V/277-DRV

Measurements (Inches)

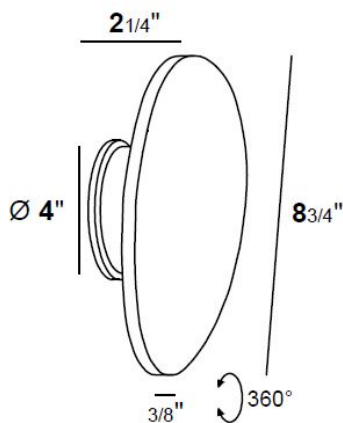

Light Distribution

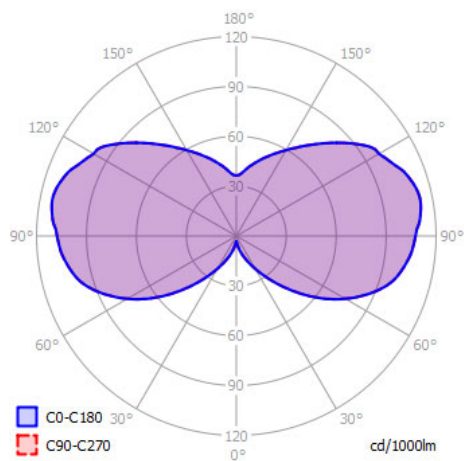

ORDERING INFORMATION

-SUFFIX

Model Number	Finish	LED Source	Color Temp.	Driver	
DUS709	-white	-7.5W	-927	-120V/277V-DRV	-120V-DIM
DUS512	-black				
-	-				
-	-				

Example of Catalog #: DUS709-white-7.5W-927-120V-DIM

DLS Lighting US
3135 SR 580, Suite 6
Safety Harbor, FL 34695
www.dslightingus.com
dsus@dslightingus.com

***DLS**
LIGHTING|US

ORBIT 4

DUS710 White DUS514 Black

LED Surface wall luminaire. indirect omnidirectional sconce.
Driver included.

FIXTURE:

Mounting: surface wall

Finish: White, Black ("powder coat")

Material: Aluminum, acrylic glass

Damp Location Listed (for use indoors)

CSA/US Listed

LAMP/LED SOURCE/COLOR TEMP:

-927

7.5W LED / 2700K / CRI ≥ 90 / 660lm

Efficacy (CRI ≥ 90): 88lm/W, Rated life > 50000hrs

DRIVER:

-120V/277V-DRV

Class 2 120V-277Vac/60Hz not dimmable,

Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 350mA

-120V-DIM

Class 2 120Vac/60Hz, TRIAC/ELV dimmable (leading/trailing edge),

Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 350mA

photometric files, dimming compatibility list and warranty information
available online at www.dslightingus.com

Project:


Type:

Cat. No.:




Shown above: DUS514-black-7.5W-927-120V/277-DRV

Measurements (Inches)

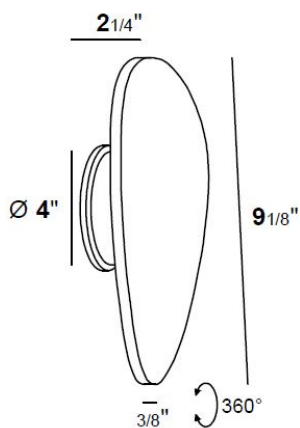

Light Distribution

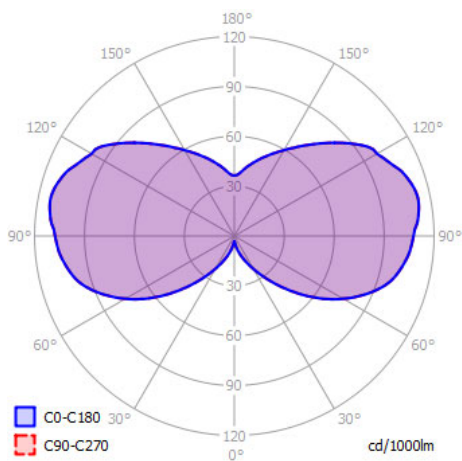

ORDERING INFORMATION

-SUFFIX

Model Number	Finish	LED Source	Color Temp.	Driver	
DUS710	-white	-7.5W	-927	-120V/277V-DRV	-120V-DIM
DUS514	-black				
-	-				
-	-				

Example of Catalog #: DUS710-white-7.5W-927-120V-DIM

DLS Lighting US
3135 SR 580, Suite 6
Safety Harbor, FL 34695
www.dslightingus.com
dsus@dslightingus.com

***DLS**
LIGHTING|US