

RINGO IN

DUS829 -W/W -W/B -W/G

DUS829B -B/B -B/G

LED Surface ceiling luminaire. Direct downlight.
Driver included.

FIXTURE:

Mounting: surface ceiling

Finish: White, Black ("powder coat")

Material: Aluminum, acrylic glass cover

Wet Location Listed (for use indoors and outdoors)

CSA/US Listed

LAMP/LED SOURCE/COLOR TEMP:

-930

12W LED / 3000K / CRI ≥ 90 / 1160lm

Efficacy (CRI ≥ 90): 96lm/W, Rated life > 50000hrs

DRIVER:

-120V/277V-DIM10V

Class 2 120-277Vac/60Hz

0-10V dimmable and TRIAC/ELV dimmable @120Vac(leading/trailing edge),

Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 500mA

OPTIONS:

-120V-DIM

Driver: Class 2 120V 60Hz, TRIAC/ELV dimmable (leading/trailing edge)

photometric files, dimming compatibility list and warranty information
available online at www.dslightingus.com

Project:


Type:

Cat. No.:




Shown above: DUS829-W/G-12W-930-120V/277V-DIM10V

Measurements (Inches)

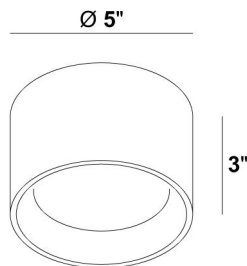

Light Distribution

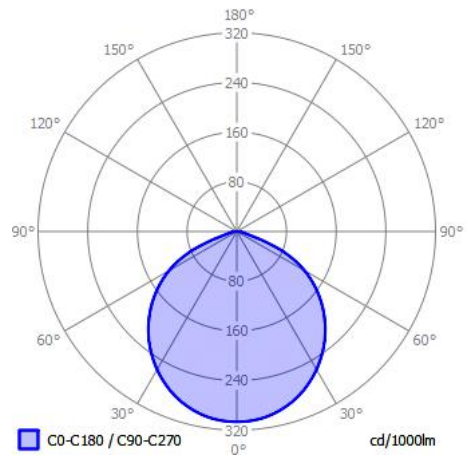

Colors



white

black



white/white

white/black

white/gold

black/black

black/gold

ORDERING INFORMATION

-SUFFIX

Model Number	Finish	LED Source	Color Temp.	Driver	
DUS829	-W/W -W/B -W/G	-12W	-930	-120V/277V - DIM10V	-120V-DIM
DUS829B	-B/B -B/G				

Example of Catalog #: DUS829-W/G-12W-930-120V/277V-DIM10V

DLS Lighting US
3135 SR 580, Suite 6
Safety Harbor, FL 34695
www.dslightingus.com
dlsus@dslightingus.com

***DLS**
LIGHTING|US