# **RINGO**

**DUS829** White Project: Type:

Cat. No.:

#### LED Surface ceiling luminaire. Direct downlight. Driver included.

Black

FIXTURE:

DUS829B

Mounting: surface ceiling

Finish: White, Black ("powder coat") Material: Aluminum, acrylic glass cover

Wet Location Listed (for use indoors and outdoors)

CSA/US Listed

# <u>LAMP/LED SOURCE/COLOR TEMP</u>: -930

12W LED / 3000K / CRI ≥ 90 / 1160lm Efficacy (CRI ≥ 90): 96lm/W, Rated life > 50000hrs

### -120V/277V-DIM10V

Class 2 120-277Vac/60Hz

0-10V dimmable and TRIAC/ELV dimmable @120Vac(leading/trailing edge), Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 500mA

**OPTIONS:** 


-120V-DIM

Driver: Class 2 120V 60Hz, TRIAC/ELV dimmable (leading/trailing edge)


photometric files, dimming compatibility list and warranty information available online at www.dlslightingus.com



Shown above: DUS829-white-12W-930-120V-DIM




## **Measurements (Inches)**

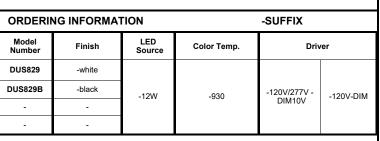

Example of Catalog #: DUS829-white-12W-930-120V/277V-DRV

# **Light Distribution**



DLS Lighting US 3135 SR 580, Suite 6 Safety Harbor, FL 34695 www.dlslightingus.com dlsus@dlslightingus.com

