

SPAGO 60 + diffuser

DUS756-11-20-03D white
DUS756-11-20-05D black

LED Surface ceiling pendant luminaire. Direct downlight.
Driver included.

FIXTURE:

Mounting: surface ceiling
Finish/Reflector: White, Black
Material: Brass Tube
Damp Location Listed (for use indoors)
CSA/US Listed

LAMP/LED SOURCE/COLOR TEMP:

2W LED / 2700K / 40° / CRI ≥ 90 / 230lm
Efficacy (CRI ≥ 90): 132lm/W, Rated life > 50000hrs

DRIVER:

Class 2 120Vac/60Hz, not dimmable,
Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 500mA

OPTIONS:

-2M 78-3/4" Cord (Standard)
-5M 197" Cord

Further mounting options see DUS-LP5, DUS-LP7 and DUS-LP8 spec sheets.

photometric files, dimming compatibility list and warranty information
available online at www.dslightingus.com

Project:


Type:

Cat. No.:




Shown above: DUS756-11-20-05D-2M

Measurements (Inches)

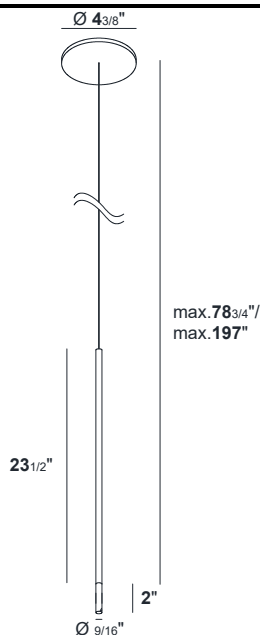

Light Distribution

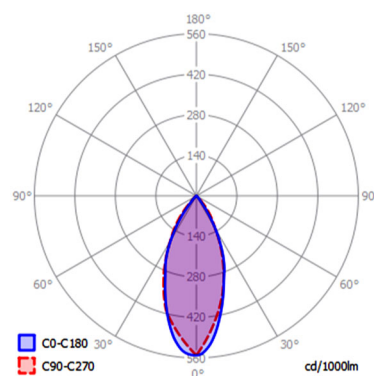

■ C0-C180 30°
■ C90-C270

Offset [ft]	Diameter [ft]	Illuminance [ftc]
2.0	1.45	139.9
4.0	2.91	34.93
6.0	4.36	15.51
8.0	5.82	8.73
10.0	7.28	5.57
12.0	8.73	3.9

ORDERING INFORMATION

-SUFFIX

Model Number	Cord Length		Finish	Color Temp.	LED Source
DUS756-11-20-03D	-2M	-5M	White	2700K	2W
DUS756-11-20-05D			Black		

Example of Catalog #: DUS756-11-20-03D-2M

DLS Lighting US
3135 SR 580, Suite 6
Safety Harbor, FL 34695
www.dslightingus.com
dsus@dslightingus.com

***DLS**
LIGHTING|US