

LILLI

DUS255 White

Project:

Type:

Cat. No.:

**LED Surface ceiling, pendant luminaire. Direct downlight.
Driver included.**

FIXTURE:

Mounting: surface ceiling
Finish/Reflector: White
Material: Aluminum
 Damp Location Listed (for use indoors)
 CSA/US Listed

LAMP/LED SOURCE/COLOR TEMP:

-930
 7W LED / 33° / 3000K / CRI ≥ 90 / 730lm
 Efficacy (CRI ≥ 90): 104lm/W, Rated life > 50000hrs


DRIVER:

-120V-DIM
 Class 2 120Vac/60Hz, TRIAC/ELV dimmable (leading/trailing edge),
 Power factor ≥ 0.9 / Flicker (THD) ≤ 20%, Constant current 350mA




photometric files, dimming compatibility list and warranty information available online at www.dslightingus.com

Measurements (Inches)

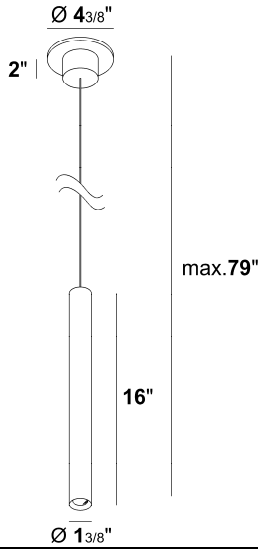

Light Distribution / Illuminance (33°)

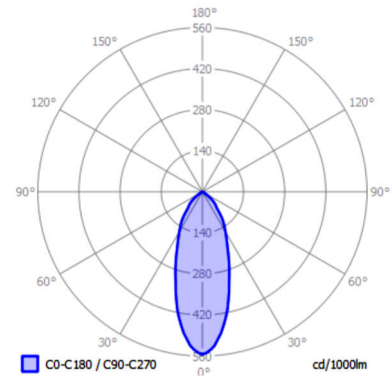

Offset (ft)	Diameter (ft)	Illuminance (fc)
2.0	1.40	101.2
4.0	2.81	25.3
6.0	4.21	11.2
8.0	5.61	6.3
10.0	7.01	4.0
12.0	8.42	2.6

ORDERING INFORMATION

-SUFFIX

Model Number	Finish	LED Source	Color Temp.	Driver
DUS255	-white	-7W	-930	-120V-DIM
-	-			
-	-			
-	-			
-	-			

Example of Catalog #: DUS255-white-7W-930-120V-DIM

DLS Lighting US
 3135 SR 580, Suite 6
 Safety Harbor, FL 34695
 www.dslightingus.com
dlsus@dslightingus.com

